

Products need labeling

Label printers with highest operating comfort



COS Made in Germany

Types

One concept, two sizes

The EOS series combines all functions of a solid label printer with highest operating comfort.



COS2, the compact one for label roll diameters up to 152 mm

Label printer		EO	S 2
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	152	152
Power supply		100 - 240 VA	AC, 50/60 Hz



eoS5 for large label rolls

with diameters up to 203 mm

Label printer		EO	S 5
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	203	203
Power supply		100 - 240 VA	AC, 50/60 Hz

Mobile printing

in production, warehousing or agriculture, wherever labels are required and access to electricity is missing. 24 V input voltage enable the printer to be power supplied by any powerful battery. For technical battery data see accessories





eoS2mobile

for label roll diameters up to 152 mm

Label printer		EOS 2 mobile
Printable resolution	dpi	300*
Print speed	up to mm/s	150
Print width	up to mm	105.7
Label roll diameter	up to mm	152
Power supply		16.5 - 25 VDC

eoS5 mobile

for label roll diameters up to 203 mm

Label printer		EOS 5 mobile
Printable resolution	dpi	300*
Print speed	up to mm/s	150
Print width	up to mm	105.7
Label roll diameter	up to mm	203
Power supply		16.5 - 25 VDC

*203 dpi on request

1.1

1.2

Details



To achieve accurate imprint with slim materials and ribbons, slim print rollers are needed. These prevent from print roller wear, print head contamination and errors during material feed.

Operation panel

Intuitive and easy operation with self-explanatory symbols to configure the device setups

 LED signal: 	Power ON			
Status bar:	Data reception, Record data stream, Ribbon pre-warning, SD memory card / USB memory stick, Bluetooth, WLAN, Ethernet, USB slave, Time			
Orinter status:	Ready, Pause, Number of printed labels per print job, Label in peel-off position, Awaiting external start signal			
USB slot	for the Service Key or a memory stick, to load data in the IFFS storage			
(5) Operation:	Cutter / perforation cutter: cutting Tear-off mode: print label			
	 Jump to menu Stop and delete all print jobs Reprint last label Label feed Interrupt and continue print job 			

Interfaces on the back of the device



Roll holder

The label roll is inserted and automatically centered when closing.

Ribbon holder

The stop can be adjusted according to the ribbon width.

Print head 203 / 300 dpi

In case of cleaning or wear, the print head can be replaced easily by hand without tools.

Label sensor - gap or reflective

The sensor position can be adjusted via a spindle using the red rotary knob. The chosen position is indicated by a LED.

Print roller DR4

In case of cleaning or wear, the print roller can be replaced without tools.

Material guide

Using the rotary knob, the guides can be adjusted to the material width

Tear-off plate

made of thin sheet steel; jagged, so labels are cleanly separated

Slot for a SD memory card

2 x USB host to connect a Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick

USB 2.0 Hi-speed Device to connect a PC

Ethernet 10/100 Mbit/s

RS232C 1,200 to 230,400 baud/8 bit

Technical data

• typical I standard 🗆 option

l abel printer	Γ		1.1		1.	2	1.3	1.4
Label printer Type Material feed		EOS 2 EOS 5 EOS 2 mobile		EOS 2 mobile	EOS 5 mobile			
					cent	ered		
Printing	Thermal transfer		•		•		•	•
method	Thermal direct		•		•	1	•	•
Printable resolution		dpi	203	300	203	300	300	300
Print speed		up to mm/s	150	150	150	150	150	150
Print width		up to mm	108	105.7	108	105.7	105.7	105.7
Start of printing	Distance to locating edge	mm				cent		
Material ¹⁾								
Paper, cardboard,								
	PI, PVC, PU, acrylate, Tyvec		•		•		•	•
Shrink tubes	ready-for-use		•		•	,	-	-
	continuous, pressed		•				_	_
Textile tapes	continuous, presseu		•				•	•
Packing	on rolls, reels		•				•	
racking	Fanfold						-	-
	Roll diameter	up to mm	152	2	20		152	203
	Core diameter	mm	152	_	20	38.1		205
	Winding					outside		
abala		mm				10 -		
Labels	Width single-lane	mm						
	multi-lane	mm from mm					116	
	Height excl. label backfeed	from mm				5		
	incl. label backfeed	from mm				1		
	Thickness	mm				0.05		
Liner material	Width	mm				25 -		
	Thickness	mm				0.05 -		
Continuous material	Width	mm				5 - 3		
	Thickness	mm				0.05	- 0.5	
	Weight (cardboard)	up to g/m ²				18	80	
Shrink tubes	Width ready-for-use	up to mm				12	0	
	continuous, pressed	mm				5 -	85	
	Thickness	up to mm				1.		
Ribbon ²⁾	Inkside					outside o	or inside	
(IDDOI1)	Roll diameter	up to mm				7		
	Core diameter	mm				25		
	Variable length	up to m				36		
	Width					25 -		
Deleter class and we		mm				25-	114	
Printer sizes and we			253 x 191		264 x 24	7 41 0	253 x 191 x 322	264 x 247 x 412
Width x Height x Dep		mm		X 322				
Weight	the second state of	kg	4		5		4	5
Label sensor indicat	ang the position	f.a.v.	lahala ay yu			havial muint un		eviale
Gap sensor	flag for the large has	for					arks on transparant mat	erials
Reflective sensor	reflex from below or top	for	labels and	end of mate	riai, print mari		sparent materials	
Distance of sensor	from centre to locating edge of					0 -		
		up to mm				4		
Electronics								
Electronics Processor 32 bit cloc	k rate	MHz				80		
Electronics Processor 32 bit clock Main memory (RAM)	k rate	MB				25	6	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS)						25 5	6 D	
	memory card (SDHC, SDXC)	MB				25 5 51	6 0 2	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD i		MB MB				25 5	6 0 2	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD B Battery for time and	memory card (SDHC, SDXC)	MB MB up to GB				25 5 51	6 0 2	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p	memory card (SDHC, SDXC) date, real-time clock	MB MB up to GB				25 5 51	6 0 2	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD B Battery for time and Data memory when p Interfaces	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria	MB MB up to GB				25 5 51	6 0 2	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD f Battery for time and Data memory when p Interfaces RS232C 1,200 to 230,	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit	MB MB up to GB				25 5 51 [6 0 2	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed dev	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC	MB MB up to GB	PD Paw/I) printing CC)ΔP webcervire	25 51 [[[[6 0 2	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD B Battery for time and	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC	MB MB up to GB			IAP webservice	25 51 [[[2, OPC UA, We	6 0 2 2 bDAV	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD i Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed dev Ethernet 10/100 Mbit	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC	MB MB up to GB I numbering)	DHCP, HTT	P/HTTPS, FT	P/FTPS, TIME,	25 51 [[[2, OPC UA, We	6 0 2	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p Interfaces R5232C 1,200 to 230, JSB 2.0 Hi-speed dee Ethernet 10/100 Mbit	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC	MB MB up to GB	DHCP, HTT Service Key	P/HTTPS, FT / or USB mer	P/FTPS, TIME, nory stick	25 5 [[[:, OPC UA, We NTP, Zerocon	6 0 2 bDAV f, SNMP, SMTP, VNC	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit 1 x USB host on the o	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC :/s operation panel	MB MB up to GB I numbering)	DHCP, HTT Service Key Service Key	P/HTTPS, FT or USB mer , USB memo	P/FTPS, TIME, mory stick ory stick, keybo	25 5 5 [[[c, OPC UA, We NTP, Zerocon	6 0 2 bDAV f, SNMP, SMTP, VNC scanner,	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (RFS) Slot to connect a SD Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed dev Ethernet 10/100 Mbit 1 x USB host on the c	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC ;/s pperation panel pack of the device	MB MB up to GB I numbering)	DHCP, HTT Service Key Service Key	P/HTTPS, FT or USB mer , USB memo	P/FTPS, TIME, mory stick ory stick, keybo	25 5 5 [[[c, OPC UA, We NTP, Zerocon	6 0 2 bDAV f, SNMP, SMTP, VNC	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit L x USB host on the c 2 x USB host on the b JSB WLAN stick 2.4 GH	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria 400 baud/8 bit vice to connect a PC 5/5 pperation panel pack of the device z802.11b/g/n	MB MB up to GB I numbering) for for	DHCP, HTT Service Key Service Key USB Blueto	P/HTTPS, FT or USB mer oth adapter,	P/FTPS, TIME, mory stick ory stick, keybo	25 5 5 [[[c, OPC UA, We NTP, Zerocon	6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed dev Ethernet 10/100 Mbit 1 x USB host on the c 2 x USB host on the t USB WLAN stick 2.4 GH 2.4 GH	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria 400 baud/8 bit vice to connect a PC c/s operation panel pack of the device z802.11b/g/n z802.11b/g/n + 5 GHz 802.11a/n/a	MB MB up to GB I numbering) for for	DHCP, HTT Service Key Service Key USB Blueto	P/HTTPS, FT or USB mer oth adapter,	P/FTPS, TIME, nory stick ory stick, keybo USB WLAN st	25 51 [c c, OPC UA, We NTP, Zerocon Dard, barcode ick, external c	6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit I x USB host on the c 2 x USB host on the b JSB WLAN stick 2.4 GH 2.4 GH	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC :/s pperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a er	MB MB up to GB I numbering) for for	DHCP, HTT Service Key Service Key USB Blueto	P/HTTPS, FT or USB mer oth adapter,	P/FTPS, TIME, nory stick ory stick, keybo USB WLAN st	25 51 51 c c c c c c c c c c c c c c c c	6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (IFFS) Slot to connect a SD is Jattery for time and Data memory when p Interfaces RS232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit L x USB host on the c 2 x USB host on the c JSB WLAN stick 2.4 GH 2.4 GH JSB Bluetooth adapt Peripheral connection	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC :/s pperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a er	MB MB up to GB I numbering) for for	DHCP, HTT Service Key Service Key USB Blueto	P/HTTPS, FT or USB mer oth adapter,	P/FTPS, TIME, nory stick ory stick, keybo USB WLAN st	25 51 [c c, OPC UA, We NTP, Zerocon Dard, barcode ick, external c	6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (RFFS) Slot to connect a SD i Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit I x USB host on the b Z x USB host on the b Z x USB host on the b LSB WLAN stick 2.4 GH 2.4 GH	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC :/s pperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a er	MB MB up to GB I numbering) for for	DHCP, HTT Service Key Service Key USB Blueto hotspot mc	P/HTTPS, FT y or USB memo y, USB memo oth adapter, ode or infrast	P/FTPS, TIME, nory stick ory stick, keybo USB WLAN st rructure mode	25 51 51 c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (RFFS) Slot to connect a SD in Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed device Ethernet 10/100 Mbit 1 x USB host on the b USB WLAN stick 2.4 GH 2.4 GH VER Bluetooth adapt Peripheral connection Operating data Power supply	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC :/s pperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a er	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mo	P/HTTPS, FT y or USB merry y, USB memo oth adapter, ade or infrast	P/FTPS, TIME, nory stick pry stick, keybe USB WLAN st rructure mode 50/60 Hz, PFC	25 51 51 c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	24 VDC
Electronics Processor 32 bit cloc Main memory (RAM) Data memory (RFFS) Slot to connect a SD i Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed dev Ethernet 10/100 Mbit 1 x USB host on the b 2 x USB host on the b 2.4 GH 2.4 GH 2.4 GH Peripheral connection Operating data	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC :/s pperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a er	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mo 10 Standby 1,	P/HTTPS, FT y or USB memo oth adapter, ode or infrast 00 - 240 VAC, 8 W / typical	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W	25 51 51 c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	24 VDC
Electronics Processor 32 bit clock Main memory (RAM) Data memory (RFFS) Slot to connect a SD in Battery for time and Data memory when p Interfaces R5232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit I x USB host on the to JSB WLAN stick 2.4 GH 2.4 GH 2.5 B Bluetooth adapt Peripheral connection Derating data Power supply Power consumption	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC ;/s opperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a ter n USB host, 24 VDC	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mo 10 Standby 1, +5 - 40°C	P/HTTPS, FT y or USB memo oth adapter, ode or infrast 00 - 240 VAC, 8 W / typical / 10 - 85 %, 1	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W not condensing	25 51 51 c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	24 VDC
Electronics Processor 32 bit clock Main memory (RAM) Data memory (RFFS) Slot to connect a SD in Battery for time and Data memory when p Interfaces RS232C 1,200 to 230, USB 2.0 Hi-speed device Ethernet 10/100 Mbit 1 x USB host on the b USB WLAN stick 2.4 GH 2.4 GH VER Bluetooth adapt Peripheral connection Operating data Power supply	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC ;/s opperation panel pack of the device z802.11b/g/n lz802.11b/g/n + 5 GHz 802.11a/n/a ter n USB host, 24 VDC	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mo 10 Standby 1, +5 - 40°C	P/HTTPS, FT y or USB memo oth adapter, ode or infrast 00 - 240 VAC, 8 W / typical / 10 - 85 %, 1	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W	25 51 51 c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	24 VDC
Electronics Processor 32 bit clock Aain memory (RAM) Data memory (RFFS) Slot to connect a SD in Battery for time and Data memory when p Interfaces SS232C 1,200 to 230, JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit L x USB host on the to 2 x USB bost on the to 2 x USB bost on the to 2 x USB bluetooth adapt Peripheral connection Derating data Power supply Power consumption	memory card (SDHC, SDXC) date, real-time clock bower is switched off (e.g. seria 400 baud/8 bit vice to connect a PC c/s operation panel back of the device z802.11b/g/n lz 802.11b/g/n + 5 GHz 802.11a/n/a er n USB host, 24 VDC	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mc 11 Standby 1, +5 - 40°C 0 - 60°C	P/HTTPS, FT y or USB memo oth adapter, bde or infrast 00 - 240 VAC, 8 W / typical / 10 - 85 %, / 20 - 85 %,	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W not condensing	25 51 51 c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	24 VDC
Electronics Processor 32 bit clock Aain memory (RAM) Data memory (RFFS) Slot to connect a SD i Slot to connect a SD i Sl	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC ;/s poperation panel pack of the device z802.11b/g/n z802.11b/g/n + 5 GHz 802.11a/n/a er n USB host, 24 VDC dity Operation Stock	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mc 11 Standby 1, +5 - 40°C 0 - 60°C -25 - 60°C	P/HTTPS, FT y or USB memo oth adapter, bde or infrast 00 - 240 VAC, 8 W / typical / 10 - 85 %, / 20 - 85 %, / 20 - 85 %,	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W not condensing not condensing not condensing	25 51 51 (c c c c c c c c c c c c c c c c c c	i6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Electronics Processor 32 bit cloc Main memory (RAM) Data memory (RFFS) Slot to connect a SD 1 Slot to connect a SD 2 Slot to	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC ;/s poperation panel pack of the device z802.11b/g/n z802.11b/g/n + 5 GHz 802.11a/n/a er n USB host, 24 VDC dity Operation Stock	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mc 11 Standby 1, +5 - 40°C 0 - 60°C -25 - 60°C	P/HTTPS, FT y or USB memo oth adapter, bde or infrast 00 - 240 VAC, 8 W / typical / 10 - 85 %, / 20 - 85 %, / 20 - 85 %,	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W not condensing not condensing not condensing	25 51 51 (c c c c c c c c c c c c c c c c c c	6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel	
Electronics Processor 32 bit clock Main memory (RAM) Data memory (RAM) Data memory (IFFS) Slot to connect a SD i Slot to the to	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria 400 baud/8 bit vice to connect a PC :/s poperation panel pack of the device z802.11b/g/n z802.11b/g/n z802.11b/g/n + 5 GHz802.11a/n/a rer n USB host, 24 VDC dity Qperation Stock Transport	MB MB up to GB I numbering) for for	DHCP, HTT Service Key USB Blueto hotspot mc 11 Standby 1, +5 - 40°C 0 - 60°C -25 - 60°C	P/HTTPS, FT y or USB memo oth adapter, bde or infrast 00 - 240 VAC, 8 W / typical / 10 - 85 %, / 20 - 85 %, / 20 - 85 %,	P/FTPS, TIME, nory stick pry stick, keybo USB WLAN st ructure mode 50/60 Hz, PFC 45 W not condensing not condensing not condensing	25 51 51 (c c c c c c c c c c c c c c c c c c	6 0 2 bDAV f, SNMP, SMTP, VNC scanner, peration panel c, EAC, BIS, BSMI, KC-Ma	

¹⁾ The material specifications are standard values. Applications with small labels, thin, slim, thick and stiff materials as well as strongly adherent labels have to be tested. ²⁾ The ribbon should at least correspond with the width of the liner material.

Technical data

Setup options					
	Print Labels Ribbon	Region: - Language - Country			
	Tear-off	- Keyboard			
	Cut	- Time zone			
	Interfaces	Time			
	Error	Display:			
		- Brightness - Power saving mode			
		- Orientation			
		Interpreter			
Status bar					
	Data reception	Bluetooth			
	Record data stream	WLAN			
	Ribbon pre-warning	Ethernet			
	SD memory card plugged USB memory stick plugged	USB slave Time			
Monitoring	OSD memory suck plugged	Time			
Monitoring	Dibbon nro worning	Devinhers, error			
	Ribbon pre-warning End of ribbon	Periphery error Print head voltage			
	End of material	Print head temperature			
		Print head open			
Test routines					
System diagnostics	on start-up, including print l				
Information display,	Status printout	Test grid			
test printout,	Fonts list	Label profile			
analysis	List of devices	List of events Monitor mode			
Chalander	WLAN status				
Status reports	- Printout of device settings,				
	e.g. print lengths and service hours - Device status request by software command				
	- Display of, e.g., network en				
	barcode errors, periphery e				
	1				
Fonts					
Font types	5 bitmap fonts:	7 vector fonts:			
	12 x 12 dots	AR Heiti Medium GB-Mono			
Font types	12 x 12 dots 16 x 16 dots	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold			
Font types	12 x 12 dots 16 x 16 dots 16 x 32 dots	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda			
Font types	12 x 12 dots 16 x 16 dots	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold			
Font types	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852,	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese traditional	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew			
Font types internally provided to be stored Character sets	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese traditional Thai	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic			
Font types internally provided	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic			
Font types internally provided to be stored Character sets	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic			
Font types internally provided to be stored Character sets Bitmap fonts	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic			
Font types internally provided to be stored Character sets	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27 Size in width and height 0,9	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic			
Font types internally provided to be stored Character sets Bitmap fonts	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27 Size in width and height 0,9- Variable zoom	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic 0° - 128 mm			
Font types internally provided to be stored Character sets Bitmap fonts Vector / TrueType fonts	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27 Size in width and height 0,9 Variable zoom Orientation 360° in steps of 1	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic 0° - 128 mm			
Font types internally provided to be stored Character sets Bitmap fonts	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Eastern European Chinese simplified Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27 Size in width and height 0,9- Variable zoom	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic 0° - 128 mm I° ne, inverse			
Font types internally provided to be stored Character sets Bitmap fonts Vector / TrueType fonts	12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B TrueType fonts Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Chinese simplified Chinese traditional Thai Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27 Size in width and height 0,9 Variable zoom Orientation 360° in steps of 1 bold, italic, underlined, outli	AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold 857, 862, 864, 866, 869 -16 Cyrillic Greek Latin Hebrew Arabic 0° - 128 mm I° ne, inverse			

Graphics Graphic elements Lines, arrows, rectangles, circles, ellipses - filled or filled with fading PCX, IMG, BMP, TIF, MAC, GIF, PNG Graphic formats Codes 1D barcodes Interleaved 2/5 Code 39, Code 93 (linear) Code 39 Full ASCII Ident and routing code Code 128 A, B, C of Deutsche Post EAN 8,13 Codabar EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 JAN 8,13 MST Plessev FIM Postnet HIBC RSS 14 UPC A, E, E0 2D and stacked codes DataMatrix DataMatrix Rectangle Extension QR code Micro QR code GS1 QR code GS1 DataMatrix PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F Dotcode RSS 14 truncated, limited, stacked, stacked omni-directional All codes are variable in terms of height, modular width and ratio; orientations 0°, 90°, 180°, 270° check digit, plain text printout and start / stop code are options depending from the type of code Software Label software cablabel S3 Lite Π cablabel S3 Viewer Π cablabel S3 Pro cablabel S3 Print with CODESOFT Also running NiceLabel BarTender Stand-alone operation 0 Windows Windows Vista Server 2008 printer drivers Server 2008 R2 Windows 7 Windows 8 Server 2012 WHQL certified 0 for Windows 8.1 Server 2012 R2 Windows 10 Server 2016 Server 2019 Apple Mac OS X from version 10.6 0 printer drivers Linux from CUPS 1.2 0 printer drivers Programming JScript printer language Π abc Basic Compiler 0 ZPL II (The datastream must be tested in advance.) SAP 0 Integration Database Connector Π Administration Printer control 0 Configuration in Intranet and Internet 0 Network Manager (in preparation) ۵

cab uses free and Open Source Software in its products. For information see **www.cab.de/opensource**

Email: bts2002@singnet.com.sg

Website: www.bts-industries.com

I standard □ option

5



TEL: +65 6566 8377

BTS INDUSTRIES (S) PTE LTD 40 TOH GUAN ROAD EAST, #01-69 ENTERPRISE HUB, SINGAPORE 608582

FAX: +65 6566 3033 / +65 6566 3733

Label software cablabel S3

Designing, printing, administrating

cablabel S3 opens up the full potential of cab devices.

First of all, the label must be designed. Only when it comes to printing it has to be decided whether the label shall be processed on a label printer, a print and apply or marker laser system. cablabel S3 is of a modular design which makes it adaptable to requirements step by step. To support functions like native JScript programming, elements such as the JScript Viewer are embedded as plug-ins. The designer user interface and the JScript code are synchronized in real time. Special functions like the Database Connector or barcode testers can be integrated. For further information see www.cab.de/en/cablabel



Toolbar a

to create different label objects

Tabs

to quickly switch from one running label design to another

8 Layers

to administrate different label objects

4 Designer

simplifies the design and displays the label WYSIWYG

5 Printer spooler to monitor all print jobs and the state of the printer

Drivers 6

for setting and the communication with devices

Email: bts2002@singnet.com.sg

Printing in stand-alone operation

This operating mode is the printer's ability to select and print labels even when it is not connected connected to a host system.

The label has to be designed with a software such as cablabel S3 or by direct programming with a text editor on a PC. Label formats, texts, graphics as well as database contents are stored on a memory card, a USB memory stick or in the internal IFFS memory.

FAX: +65 6566 3033 / +65 6566 3733

Only variable data are sent to the printer via a keyboard, a barcode scanner, scales or other host systems and/or recalled by the Database Connector from the host and printed.





Printer control

Drivers

To control the printer with a software other than cablabel S3, cab provides drivers in 32 / 64 bit for operating systems starting from Windows Vista, Mac OS 10.6 and Linux with CUPS 1.2.



Windows¹⁾ drivers

cab printer drivers are certified according to WHQL. They ensure optimum stability on the Windows operating system.



Mac OS X²⁾³⁾ drivers

cab provides CUPS-based printer drivers for Mac OS X applications.



Linux drivers³⁾

Linux drivers are CUPS-based.

Free download on www.cab.de/en/support

Programming

JScript

To control the printer, cab has developed the embedded cab programming language JScript. See manual for free download at www.cab.de/en/programming

ABC


abc Basic Compiler

In addition to JScript and as an integral part of the firmware, it allows advanced printer programming before data are sent to printout. For example, external printer languages can be replaced without interfering in the current print job. Also data from other systems such as a scale, a barcode scanner or PLC can be integrated.

Integration

Printer Vendor Program SAP

As a partner in SAP's⁴) Printer Vendor Program, cab has developed a replace method to enable easy control of a cab printer via SAPScript from SAP R/3. Only variable data are sent to the printer by the host. Pictures and fonts that had priorly been stored in the local memory (IFFS, memory card, etc.) are merged.

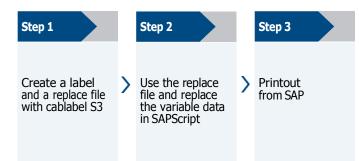

40 TOH GUAN ROAD EAST, #01-69 ENTERPRISE HUB, SINGAPORE 608582 FAX: +65 6566 3033 / +65 6566 3733

¹⁾ Windows is a registered trademark of Microsoft Corporation

- ²⁾ MAC OS X is a registered trademark of Apple Computer, Inc.
- ³⁾ for device series SQUIX, MACH 4S, EOS, HERMES Q, PX Q ⁴⁾ SAP and all corresponding logos are trademarks
- or registered trademarks of SAD SF

BTS INDUSTRIES (S) PTE LTD

TEL: +65 6566 8377





Database Connector

Email: bts2002@singnet.com.sg

Printers connected to a network may directly access data from a central ODBC or OLEDB-ready database and print it on a label. While printing, data can be rewritten to the database.



Website: www.bts-industries.com

Printer administration



Configuration in Intranet and Internet

The HTTP and FTP server integrated in the printer via Ų standard programs like a web browser or FTP clients allows printer control and configuration, firmware updates and memory card administration. Via email or SNMP, the SNMP and SMTP client datagram sends status, warning and error messages to administrators and users. Time and date are synchronized by a time server.

Printer Administration			_		
Tana Cherche Daub	anne Denne Elitada	Elwa .			(Care part
	cab E	OS 2/300 4.00 Aug 14, 2010 1 160-160 25.01		Nandaria Weser, ad (a)	1 Ha 1
	Operative time	Sharehov of	Laterts	1 Accession	ana 11 01 Ann
	Talar (Pr	Boney Total	389		
	Boronn -	Service			-
	Thermal transfer	Thermal d	irect		
		HE m Tutal	0.00		Ready
	Service -	Service			
Date Time 2013-05-12 10 50 35		Servege Darke		10	



Network Manager in preparation

It is possible to simultaneously manage several printers within the network. Control, configuration, firmware updates, memory card administration, data synchronization and PIN administration are supported from one single location.

ab cab Network Manager						- 0 8
Device Tools Options H	leip					
	Aa 1		2			
	Name	Group	Туре	Address	Status	Pin
192.168.100.48			cab A4+/300	192.168.100.48	Ready	()
192.168.100.54	10000	(and)	cab XC4/300	192,168,100,72	Ready	0-0

Accessories for all types of devices

3 Print roller DR4-30 Material width up to 30 mm;	2.5	SD memory card
synthetic rubber coating for accurate imprint		USB memory stick
Print roller DR4-60	2.7	USB WLAN stick 2.4 GHz 802.11b/g/n
Material width up to 60 mm; synthetic rubber coating for accurate imprint		USB WLAN stick 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac in infrastructure mode with rod antenna for extended reach
External operation panel	2.9	USB Bluetooth adapter
	2.10	Label selection - I/O box
Users are free to choose whether to operate the printer on the external panel or on the one integrated in the device.		Up to 16 different labels per box can be selected from the memory card by a master control, e.g. PLC. Two boxes
Printer connection: USB 2.0 Hi-speed device		can be connected. The I/O box allows simple PLC control processes
Connecting cables are required for power supply. The following or equivalent cables		with four inputs and outputs each via abc programming.
	3.1	Connecting cable RS232 C
Connecting cables USB Lengths 1.8 to 16 m		9/9 pin, length 3 m
	Material width up to 30 mm; synthetic rubber coating for accurate imprint Print roller DR4-60 Material width up to 60 mm; synthetic rubber coating for accurate imprint External operation panel providing the same functionality as on the printer Users are free to choose whether to operate the printer on the external panel or on the one integrated in the device. Printer connection: USB 2.0 Hi-speed device Connecting cables are required for power supply. The following or equivalent cables ensure functionality. Connecting cables USB	Material width up to 30 mm; synthetic rubber coating for accurate imprint2.6Print roller DR4-60 Material width up to 60 mm; synthetic rubber coating for accurate imprint2.7External operation panel providing the same functionality as on the printer2.9Users are free to choose whether to operate the printer on the external panel or on the one integrated in the device. Printer connection: USB 2.0 Hi-speed device Connecting cables are required for power supply. The following or equivalent cables ensure functionality.3.1Connecting cables USB3.1



Cutter

All printable materials can be cut. The cutter can be pivoted to exchange the material.

		Cutter
Technical data		for EOS 2, EOS 5
Material Width	mm	120
Weight cardb	oard gr/m ²	60 - 240
Thickness	mm	0.05 - 1.1
Cutting length	from mm	10
Gap height	up to mm	2.5
Cuts/min	up to	200
Label winding		preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached

4.2

Cutter and perforation cutter

Continuous materials such as textiles or shrink tubes are perforated before they are manually separated. In addition, the materials can also be cut. The cutter can be pivoted to exchange the material.

		Cutter and perforation cutter
Technical da	ata	for EOS 2, EOS 5
Perforating	Web distance mm	n 2.5
_	Web width mr	m 0.8
Material Wid	th mr	m 45
Wei	ght cardboard gr/m	n ² 60 - 240
Thio	ckness mr	m 0.05 - 1.1
Cutting lengt	th from mr	m 10
Gap height	up to mr	m 2.5
Cuts/min	up t	to 200
Label windin	g	preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached

BTS INDUSTRIES (S) PTE LTD 40 TOH GUAN ROAD EAST, #01-69 ENTERPRISE HUB, SINGAPORE 608582 TEL: +65 6566 8377

Website: www.bts-industries.com

Accessories



External unwinder

Brake for fanfold labels

When inserted, the material rolls are automatically centered. The unwinder cannot be installed with EOS mobile.

		External unwinder
Technical data		for EOS 2, EOS 5
Roll diameter	up to mm	390
Core diameter	from mm	38
Winding		outside or inside
Roll weight	up to kg	4

for EOS 2 and EOS 5. The fanfold material is tightly fed in the printer and printed precisely. The brake cannot be installed with EOS mobile.



with a cha It is instal a maximu

Battery pack

with a charger unit already included for mobile operation. It is installed under EOS mobile. Per battery capacity, a maximum of 500 print jobs with a label size of 100 x 68 mm and 15 per cent density may be processed.

		Battery pack 2
Technical data		for EOS 2, EOS 5
Nominal voltage	V	18
Capacity	Ah	2.1
Power	Wh	36
Charging time approx. h		2
Charging voltage		100 - 240 VAC, 50/60 Hz
Dimensions W x H x D mm		221 x 58 x 270
Weight	kg	2.5



6.1

JA0 180

TEL: +65 6566 8377

1 0

Akkupack

10

Delivery program

Pos.		Part no.	Printers		
1.1		5978201 5978202	Label printer EOS 2/200 Label printer EOS 2/300		
1.2		5978211 5978212	Label printer EOS 5/200 Label printer EOS 5/300		
1.3		5978202.600	Label printer EOS 2 mobile/300		
1.4		5978212.600	Label printer EOS 5 mobile/300		
		Scope of deliv	ery		
	Label printer Power cable Type E+F, length 1.8 m Connecting cable USB, length 1.8 m Instructions DE / EN				
		Available onli	ne		
Instructions in 30 languages Configuration manual DE / EN / FR Service manual DE / EN Spare parts list DE / EN Programming manual EN https://setup.cab.de/en WHQL certified Windows printer drivers for Windows Vista Server 2008 Windows 7 Server 2008 R2 Windows 8 Server 2012 Windows 8.1 Server 2012 R2 Windows 10 Server 2016 Server 2019					
	Apple Mac OS X printer drivers DE / EN / FR Linux printer drivers DE / EN / FR Label software cablabel S3 Lite cablabel S3 Viewer Database Connector				
Pos.		Part no.	Wear parts		
2.1		5966096.001 5965580.001	Print head 200 dpi Print head 300 dpi		
2.2	£	5965488.001	Print roller DR4		
Pos.		Part no.	Accessories		
2.3		5966218.001 5966219.001	Print roller DR4-30 Print roller DR4-60		
	-				

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.

Date		Deuters	
Pos.		Part no. 6010186	Accessories
		5907718.850	External operation panel Connecting cable USB , 1.8 m
		5907730.850	Connecting cable USB, 3 m
2.4			
	\frown	5907750.850	Connecting cable USB, 5 m
		5907760.850	Connecting cable USB, 11 m
		5907765.850	Connecting cable USB, 16 m
2.5	Ĩ	5977370	SD memory card
2.6	1	5977730	USB memory stick
2.7	N	5978912.001	USB WLAN stick 2.4 GHz 802.11b/g/n
2.8		5977731	USB WLAN stick with rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.9	<u>I</u>	5977732	USB Bluetooth adapter
2.10	ß	5948205	Label selection - I/O box
3.1		5550818	Connecting cable RS232 C 9/9 pin, length 3 m
4.1		5965520 5966730	Cutter EOS 2 Cutter EOS 5
4.2		5965910	Cutter and perforation cutter EOS 2
7.2		5969891	Cutter and perforation cutter EOS 5
5.1	Ó	5965586	External unwinder EOS
5.2	11-1	5953753	Brake for fanfold labels EOS
6.1	PARTIE of Marie	5542640 5542660	Battery pack 2 EOS 2 Battery pack 2 EOS 5
Pos.		Part no.	Label software
		Bundle	cablabelS3Lite(Downloadatcab.de/en)
11.7		5588001 5588100 5588101 5588150 5588151 5588152 5588105 5588105 5588106 5588155 5588156 5588157 in preparation	cablabel S3 PRO 1 WS cablabel S3 PRO 1 WS cablabel S3 PRO 5 WS cablabel S3 PRO 10 WS cablabel S3 PRO 1 add. licence cablabel S3 PRO 4 add. licences cablabel S3 PRO 9 add. licences cablabel S3 Print 1 WS cablabel S3 Print 5 WS cablabel S3 Print 10 WS cablabel S3 Print 1 add. licence cablabel S3 Print 4 add. licences cablabel S3 Print 9 add. licences cablabel S3 Print 9 add. licences
11.10		9008486	Programming manual EN,
		2000-00	printed copy

TEL: +65 6566 8377

FAX: +65 6566 3033 / +65 6566 3733 Email: bts2002@singnet.com.sg

cab product overview

Label printers MACH1, MACH2



Label printers **SQUIX 2**



Label printer XD4T double-sided



Tube labeling systems AXON



Label dispensers HS, VS



Label printers **SQUIX** 4

Label printers

EOS 2




Label printers XC two-colored



Print modules PX Q



Labeling heads



BTS INDUSTRIES (S) PTE LTD 40 TOH GUAN ROAD EAST, #01-69 ENTERPRISE HUB, SINGAPORE 608582 FAX: +65 6566 3033 / +65 6566 3733 TEL: +65 6566 8377

Email: bts2002@singnet.com.sg





Label printers

Label printers SQUIX 6.3

Print and apply systems

Labels and ribbons

Marking lasers

XENO 4

HERMES Q

EOS 5

MACH 4S

Label printers

Label printer A8+

Print and apply systems Hermes C two-colored

Label software cablabel S3

Laser marking systems